


CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

BELT CONVEYORS 6" Box Frame

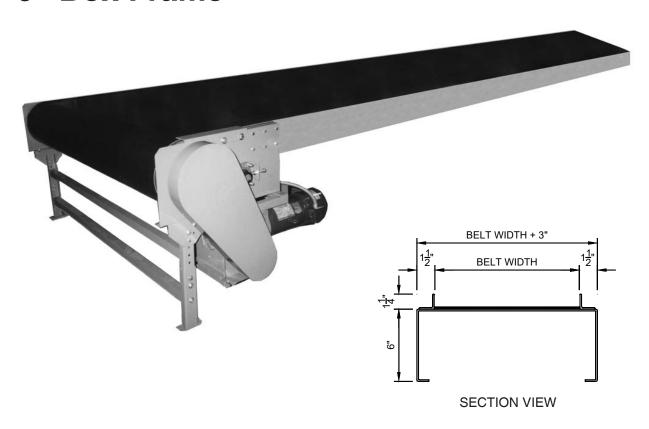

SPECIFICATIONS

WIDTHS: 12" Thru 72" Belt

BED: 15" Thru 75" Wide x 6" Deep x 12 or 10 Ga Steel Box Channel Slider Bed

HEAD PULLEY: 6", 9" or 12" Dia. Crowned Lagged;1 3/16", 1 7/16" or 1 15/16" Dia Shaft

TAIL PULLEY: 4" or 6" Dia Crowned; 1", 1 3/16" or 1 7/16" Dia. Shaft

BEARINGS: Anti-Friction Ball Bearing

DRIVE: End or Center Drive, Roller Chain From Reducer to Headshaft

MOTOR: 1725 RPM, 56 C-Face, TEFC, Wired 115/230-60-1 or 230/460-60-3

REDUCER: Right Angle 56 C-Face
BELT: Smooth or Ruff Top PVC

CONTROLS: As Required