
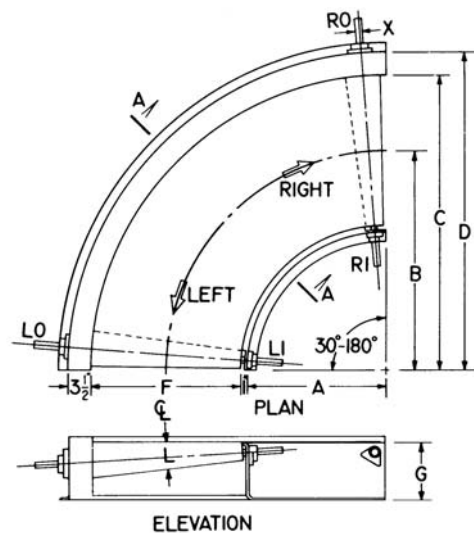


Spartec Conveyors

17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

POWERED BELT TURN

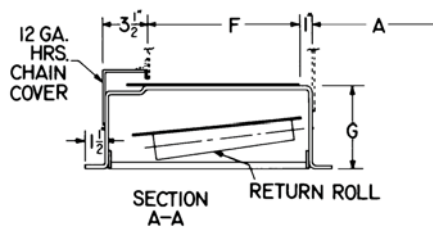

SPECIFICATIONS

WIDTHS: 4" Thru 48" Effective Belt x 15° To 350° Arc

BED: 6.5" Thru 12" Deep x 12 Ga Mild Steel or Stainless Steel Box Slider Bed

DRIVE PULLEY: Tapered Pulley with Sprocket; 1", 1 3/16" or 1 7/16" Dia Shaft

TAIL PULLEY: Tapered Pulley with Sprocket; 1", 1 3/16" or 1 7/16" Dia Shaft

BEARINGS: Anti-Friction Ball Bearing

DRIVE: Side Mount

MOTOR: 1725 RPM, 56 C-Face, Open DP, Wired 230/460-60-3

REDUCER: Shaft Mounted 56 C-Face

BELT: Black Nitrile, FS x FS, Clipper Lacing, #50 Sidebow Chain

CONTROLS: As Required