
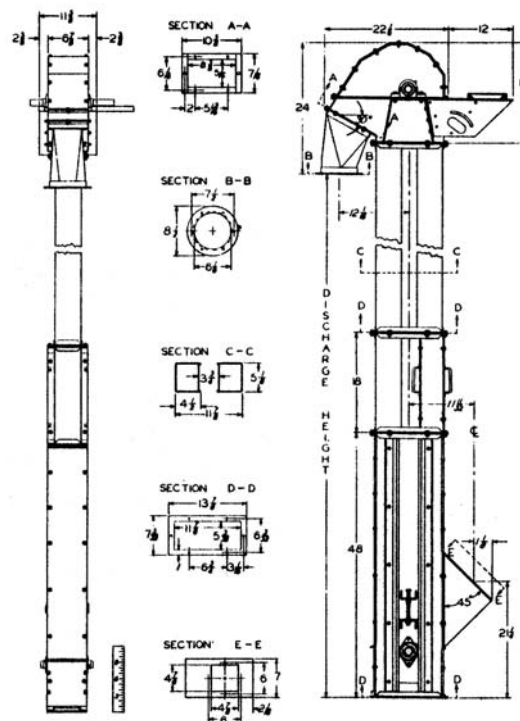


Spartec Conveyors

17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS ••• PARTS • SCRAP • PACKAGE • BULK HANDLING

BUCKET ELEVATOR Light Duty

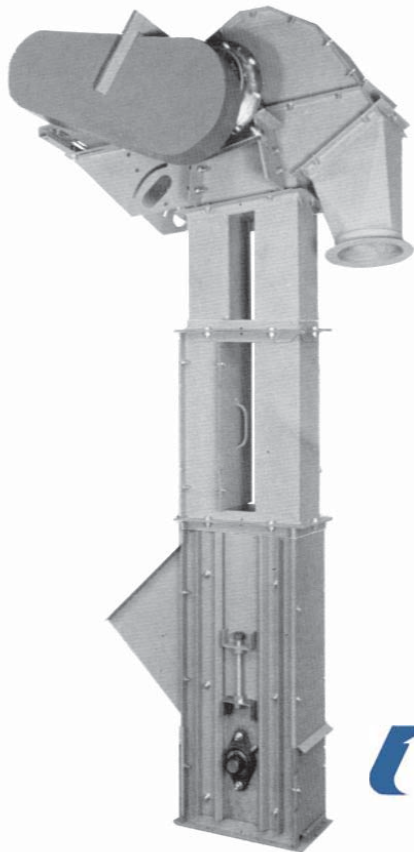

SPECIFICATIONS

CAPACITY: 94 to 375 CFH @ 75% Bucket Filling

FRAME: 14 Ga Head Casing, 12 Ga Boot Casing, 16 Ga Legging

HEAD PULLEY: 4 1/4" Dia Crowned Vulcanized Rubber Lagged, 1 3/16" Dia Shaft

TAIL PULLEY: 4" Dia Nylon or Cast Iron Slatted, 1 3/16" Dia Shaft

BEARINGS: Anti-Friction Ball Bearing

DRIVE: V-Belts From Motor to Reducer

MOTOR: 1725 RPM, Straight Drive, TEFC, Wired 230/460-60-3

REDUCER: Shaft Mount

BELT: 4" Wide Black PVC

BUCKETS: 3 3/4" x 3" HD Polyethylene, 18 or 14 Ga Mild Steel or Stainless Steel, 3 1/4" Centers

CONTROLS: As Required