



CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

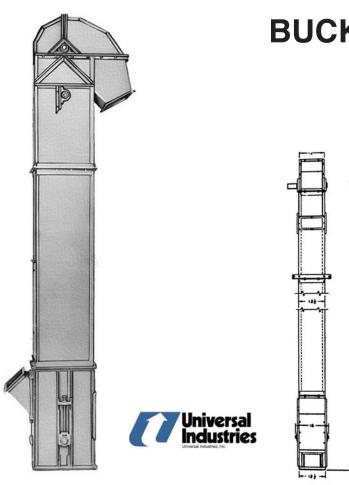

BUCKET ELEVATOR Medium Duty

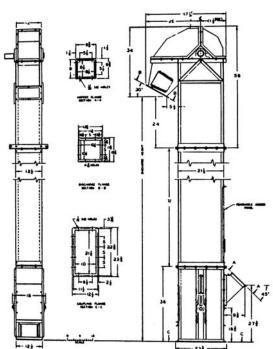

SPECIFICATIONS

CAPACITY: 800 to 2000 CFH @ 85% Bucket Filling

FRAME: 14 / 11 Ga Head Casing, 10 Ga Boot Casing, 14 Ga Legging

HEAD PULLEY: 8 3/8" Dia Crowned Vulcanized Rubber Lagged, 1 11/16" Dia Shaft

TAIL PULLEY: 8" Dia Cast Iron Slatted, 1 3/16" Dia Shaft

BEARINGS: Anti-Friction Ball Bearing
DRIVE: V-Belts From Motor to Reducer

MOTOR: 1725 RPM, Straight Drive, TEFC, Wired 230/460-60-3

REDUCER: Shaft Mount BELT: 8" Wide Black PVC

BUCKETS: 7" x 4 1/2" HD Polyethylene, 14 or 11 Ga Mild Steel or Stainless Steel, 5" Centers

CONTROLS: As Required