




Spartec Conveyors

17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS ••• PARTS • SCRAP • PACKAGE • BULK HANDLING

CLEATED BELT CONVEYORS Channel Frame

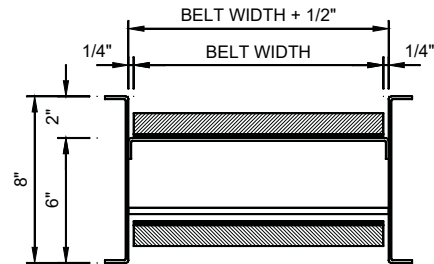

SECTION VIEW

SPECIFICATIONS

WIDTHS: 4" Thru 72" Belt

FRAME: 4 1/2" Thru 36 1/2" B-F Width x 8" to 12" Deep, 12 or 10 Ga Formed Steel Channel

HEAD PULLEY: 4 1/2" or 6" Dia Machine Crowned Lagged; 1" or 1 3/16" Dia Shaft

TAIL PULLEY: 4" Dia Machine Crowned, 1" or 1 3/16" Dia Shaft

BEARINGS: Anti-Friction Ball Bearing

DRIVE: Top or Bottom Mount, Roller Chain From Reducer to Headshaft

MOTOR: 1725 RPM, 56 C-Face, TEFC, Wired 115/230-60-1

REDUCER: Right Angle 56 C-Face

BELT: Smooth Top Cleated PVC

CONTROLS: 110-V Toggle Starter, Thermal Overload, Cable & Plug Mounted & Wired