




Spartec Conveyors

17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

MAGNETIC SLIDE CONVEYORS

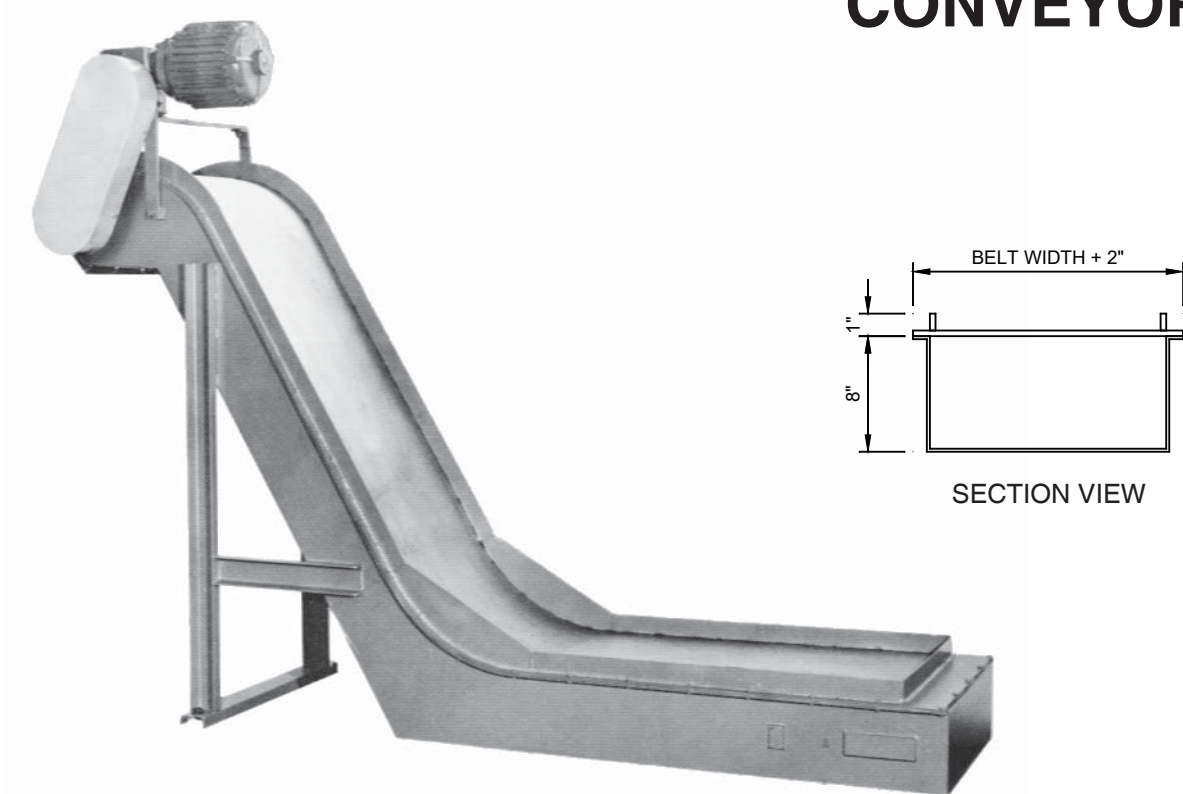

SPECIFICATIONS

WIDTHS: 6" Thru 30" Belt

FRAME: 4" To 10" Deep Steel Channel, Smooth or Rigidized Stainless Slider Bed

HEAD SPROCKETS: 50 B x 22 Tooth

TAIL SPROCKETS: 50 B x 22 Tooth

BEARINGS: Anti-Friction Ball Bearing

DRIVE: Top Mount, Roller Chain From Reducer to Drive Shaft

MOTOR: 1725 RPM, 56 C-Face, TEFC, Wired 115/230-60-1 or 230/460-60-3

REDUCER: Right Angle 56 C-Face

BELT: Ceramic Permanent Magnets @ 6", 12", 18" or 24" Centers

CONTROLS: As Required