


CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

SLIP-TORQUE ®

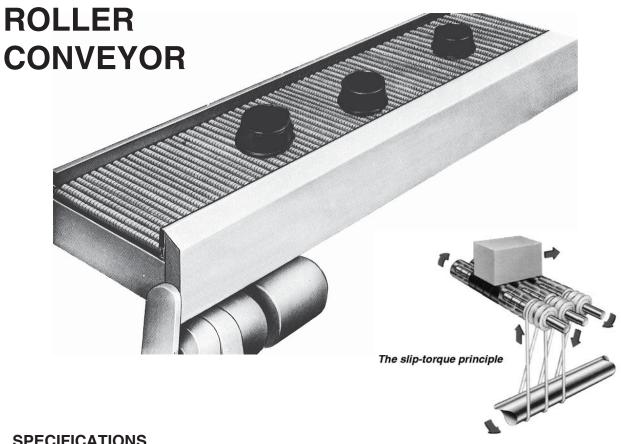

SPECIFICATIONS

Widths: 4" Thru 59" Effective

Frame: 5.3" Deep Stainless Steel or Extruded Aluminum

Rollers: Fine Pitch .699" Dia, Standard Pitch .827" Dia, Course Pitch 1.26" Dia

Axles: 8 mm Dia Stainless Steel

Line-Shaft: 1" Dia Zinc Plated CRS or Stainless Steel

Drive Belts: 1/8" Dia

Bearings: Anti-Friction Ball Bearing

Drive: Bottom Mount, Roller Chain From Reducer to Line-Shaft Motor: 1725 RPM, 56 C-Face, TEFC, Wired 230/460-60-3

Reducer: Right Angle 56 C-Face

Controls: As Required