



Spartec Conveyors


17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

TROUGH BELT CONVEYORS

Channel Frame

Dual Roll Idlers

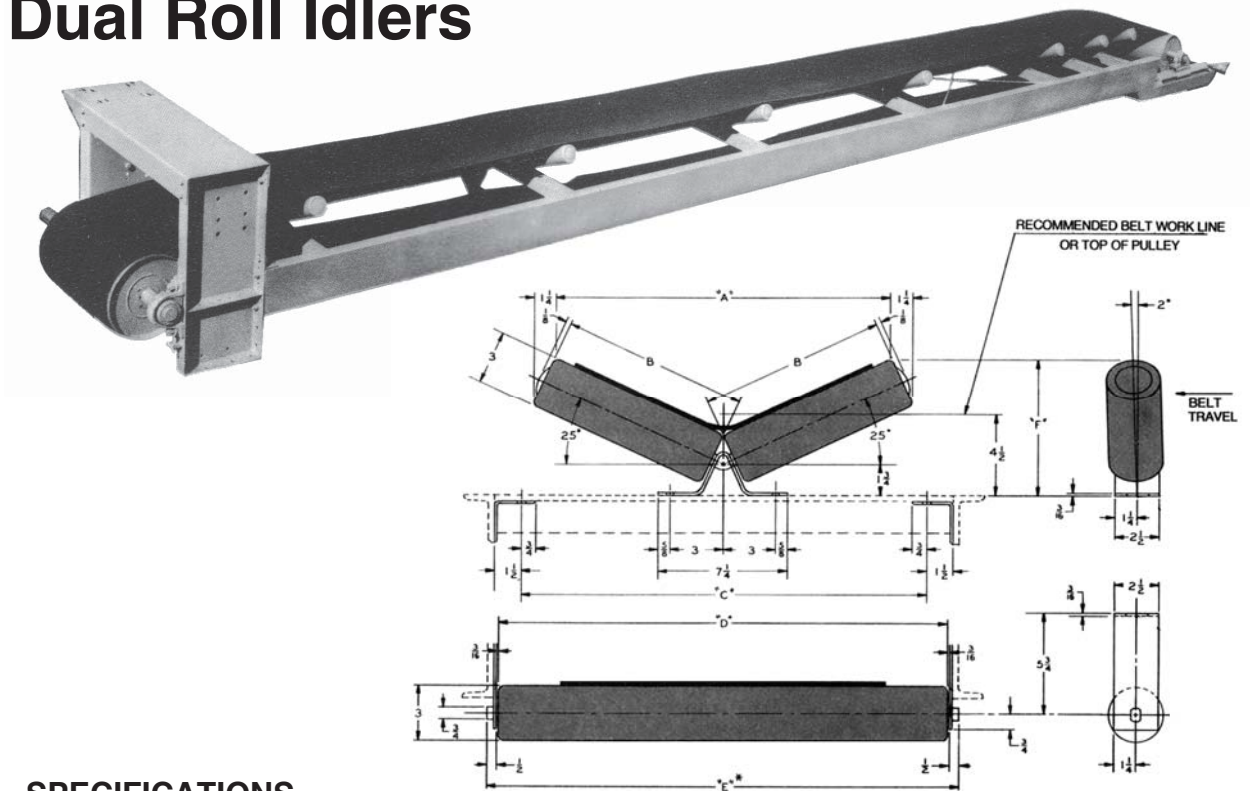

SPECIFICATIONS

WIDTHS: 12", 18", 24", 30" & 36" Belt

FRAME: 4", 5", & 7" Structural Steel Channel

IDLERS: 3" Dia X 13 Ga Steel, 25° Dual Roll, 3/4" Dia Shafts

HEAD PULLEY: 13" & 18" Dia Crowned Lagged, 1 15/16" To 3 7/16" Dia Shaft

TAIL PULLEY: 10" & 12" Dia Crowned, 1 11/16" & 1 15/16" Dia Shaft

BEARINGS: Anti-Friction Ball Bearing

DRIVE: Top Mount, V-Belts From Motor to Reducer

MOTOR: 1725 RPM, Straight Drive, TEFC, Wired 230/460-60-3

REDUCER: Shaft Mounted

BELT: 1-Ply & 2-Ply Nylon, 1/32" x 1/32" Covers

CONTROLS: As Required