



Spartec Conveyors



17181 LANDWER CT, SPRING LAKE, MI 49456
616-846-4300 • www.q-1enterprises.com

CONVEYORS • • • PARTS • SCRAP • PACKAGE • BULK HANDLING

VIBRATING CONVEYORS


Leaf Spring

Light Duty

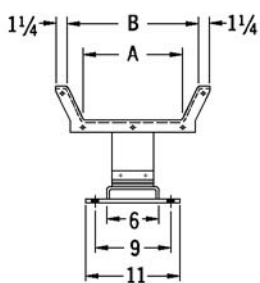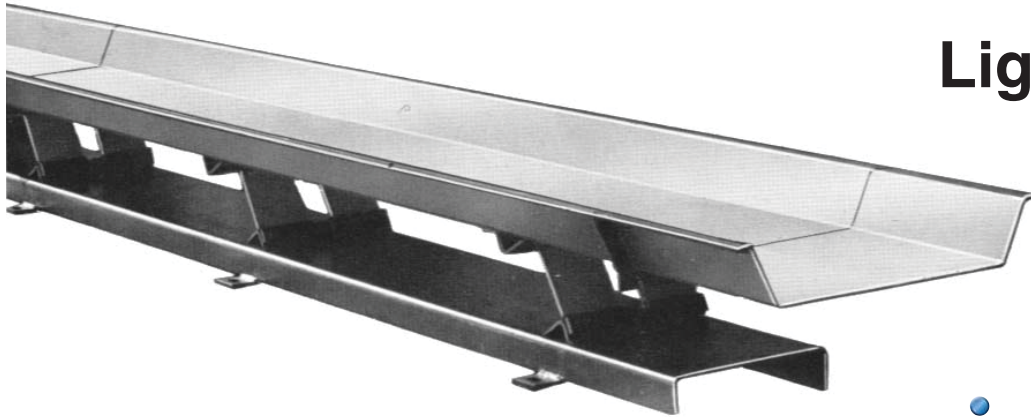

VIEW A-A
NARROW BASE

PAN BOTTOM 8" MIN.-15" MAX.

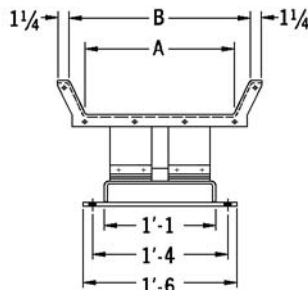

VIEW A-A
WIDE BASE

PAN BOTTOM 15" MIN.-18" MAX.

Pan Size	A	B	C	D	E	Base
12/16	12	16	4	1 7/8	1'-1 3/4	Narrow
12/18	12	18	6	1 7/8	1'-3 3/4	Narrow
18/22	18	22	4	3	1'-2 15/16	Wide
18/24	18	24	6	3	1'-4 15/16	Wide

Pans of other widths and depths with either flared or straight sides are available.

SPECIFICATIONS

WIDTHS: 12" & 18" Pan

PAN: 10 Ga & 3/16" x 4" & 6" Deep, High Strength Low Alloy Steel

SPRINGS: Glass Filament Reinforced Plastic Leaf Springs, 1/2" Stroke @ 585 RPM

FRAME: 6" & 13" Formed Steel Channel

DRIVE: Center or End Drive, Eccentric Drive Shaft, Positive Connecting Arm, Steel Encased Rubber Bushing, Spherical Roller Bearings

MOTOR: 1725 RPM, Straight Drive, NEMA-B, TEFC, Wired 230/460-60-3

CONTROLS: As Required